

**SPECIFICATION**

Quality		: <b>VERONA</b>
Product definition		: tufted loop pile
Gauge		: 1/10"
No. of tufts	ISO 1763	: ± 187.470/m <sup>2</sup> (± 163043/yd <sup>2</sup> )
Pile fibre		: 100% polypropylene
Pile weight	ISO 8543	: 400 gr/m <sup>2</sup> ± 5% (± 10 oz/yd <sup>2</sup> )
Pile height	ISO 1766	: 2.9 mm ± 5%
Primary backing		: PA/PES non-woven
Tile backing		: Polyflex with a non-woven fabric
Total thickness	ISO 1765	: 5.2 mm ± 5%
Total weight	ISO 8543	: 3779 gr/m <sup>2</sup> ± 7,5% (± 109 oz/yd <sup>2</sup> )
Tile size		: 50 x 50 cm (± 19.7" x 19.7")
Tiles per box		: 20

**PERFORMANCE**


Use classification		: 31
Abrasion	ISO 12951	: pass
Vettermann test	ISO 10361	: pass
Dimensional stability	EN 986	: pass
Thermal isolation	ISO 8302	: 0.10 m <sup>2</sup> K/W

**ELECTROSTATIC PROPERTIES**

Static loading		: anti-static
----------------	--	---------------

**FLAME PROPERTIES**

Hot metal nut test	BS 4790	: Low Radius
--------------------	---------	--------------

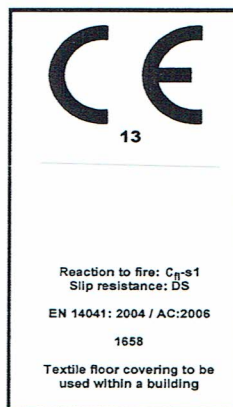

**COLOUR FASTNESS PROPERTIES**

Light	ISO 105 B02	: 4.4
Rubbing, dry	ISO 105 X12	: 5.0
Rubbing, wet	ISO 105 X12	: 5.0
Shampoo	BS 1006	: 4.8
Water	ISO 105 E01	: 4.8

**GENERAL**

Recommended maintenance:  
Pile direction:

Best results are obtained when cleaned with a dry shampoo method.

Directional arrows are printed on the back of each tile.

Best results are obtained when laid checkerboard.

Laying instructions:

Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m<sup>2</sup> it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

**COLOURS**

7872 Grey	7785 Antra / Red
--------------	---------------------

7285 Marine	7284 Royal Blue
----------------	--------------------

7297 Chestnut	7078 Beige / Grey
------------------	----------------------

7279 Black	7782 Antra
7278 Dark Grey	

7277 Antra	8458 Blue / Grey
7272 Light Grey	

7293 Sand	7242 Green	7215 Red
	7270 Beige	Polyflex Backing